

**S Sandberg®**  
**ACTIVE**

# Survivor Radio All-in-1 5000


Quick guide

421-03



[www.sandberg.world](http://www.sandberg.world)

Product overview

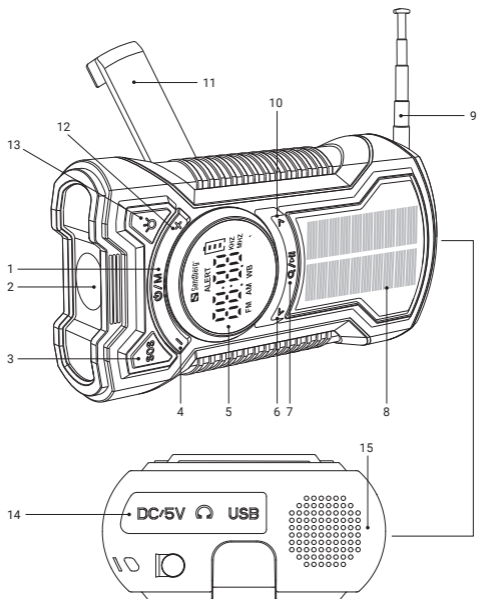

1. Power / Mode switching

2. Lights

3. SOS

4. Volume -

5. Display

6. Skip station / song <

7. Search/Select/Pause

8. Solar panel

9. Retractable antenna

10. Skip station / song >

11. Hand crank


12. Volume +

13. Light switching

14. Charging / Headphone

15. Speaker


## Display overview

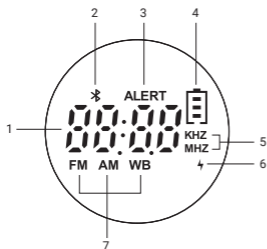

1. Information display  
(Numbers or text 4 digits)
2. Bluetooth speaker mode
3. WB weather alert on
4. Battery status
5. Frequency KHZ / MHZ
6. Charge indicator
7. Radio mode FM / AM / WB

## Charging the internal battery


### Hand crank



Turn the crank at 120 - 150 rpm (2 - 2.5 times per second). 1 minute of turning can power the radio for about 3 minutes.

Approximately charging time by the hand crank (battery 0-25%): 5 hours


### Solar panel




Make sure to place the solar panel in direct sunlight with no shadow.

Approximately charging time by the solar panel (battery 0-25%): 20 hours

### AC charger

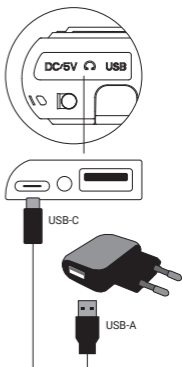



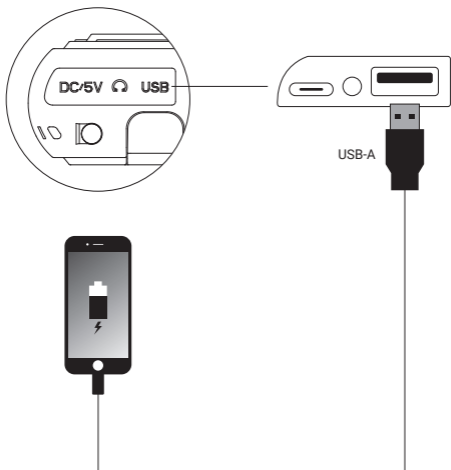

## Charge device









## Operation




Symbol	Press	Function
	Long (3 sec)	Power on/off

Symbol	Press	Function	Options
	Short (toggle)	Select mode	FM
	Short (toggle)	Select mode	AM
	Short (toggle)	Select mode	WB
	Short (toggle)	Select mode	Bluetooth



**WB (Weather Broadcast NOAA) Mode:** This service is only available in US and some other countries.

Symbol	Press	Function	Options
	Short (toggle)	Select songs forward / backwards	Skip-next/previous
	Short (toggle)	Pause/Play	-

Symbol	Press	Function	Options
	Short	Frequency up / down	Manual setting
	Long	Frequency up / down	Auto search
	Long	Full auto search and storage	P01-P99
	Short (toggle)	Select prestored channels	P01-P99

Symbol	Press	Function	Options
	Short (toggle)	Select prestored channels	CH1 - CH7
	Long	Auto NOAA Alert ON	Go to next step
	Short	Exit Auto Alert state	-

### Speaker volume setting

Symbol	Press	Function	Options
	Short (repeating)	Volume down	Steps 0-27
	Short (repeating)	Volume up	Steps 0-27

## SOS alarm (Warning! Loud horn sound and red light)

Symbol	Press	Function	Options
SOS	Short (first time)	Activate SOS alarm horn & light	-
SOS	Short (second time)	Deactivate SOS alarm horn & light	-

## LED light


Symbol	Press	Function	Options
	Short (toggle)	Turn on/off center torch	Long beam
	Long (toggle)	Turn on/off side torches	Short beam

## Bluetooth Mode

When no device is connected, it will be visible for your Bluetooth search.



Turn on Bluetooth on your mobile phone or tablet or computer.

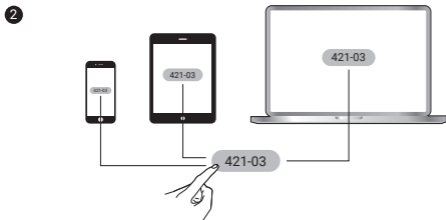

Look for "421-03" in your Bluetooth search list and select connect.

## CE letter of conformity



### Declaration of Conformity

Manufacturer:	Sandberg A/S
Address:	Bregneroedvej 133D, 3460 Birkerøed, Denmark
Product description:	Multi device of powerbank, AM+FM radio, speaker and lamp
Product name/Type no:	Survivor Radio All-in-1 5000 / 421-03

We declare under our sole responsibility that the products, to which this declaration relates, are in conformity with the Council Directives on the approximation of the laws of the EEC Member States relating to the following:

#### Directives

EMC Directive 2014/30/EU  
RED Directive 2014/53/EU  
RoHS Directive 2011/65/EU with amendment (EU)2015/863:

#### And standards

EN IEC 62368-1:2020+A11:2020  
EN 62479:2010  
ETSI EN 301 489-1 V2.2.3 (2019-11)  
EN 301 489-17 V3.2.4 (2020-09)  
ETSI EN 303 345-1 V1.1.1:2019  
ETSI EN 303 345-2 V1.2.1:2021  
ETSI EN 303 345-3 V1.1.1:2021

Date: 15<sup>th</sup> June 2024

Location: Birkerøed, Denmark

Name: Anders Petersen

  
\_\_\_\_\_  
Signature

**Support**

<http://helpdesk.sandberg.world>

## Warranty

There is a five-year warranty on your Sandberg product. Please read the warranty terms and register your new Sandberg product at [www.sandberg.world/warranty](http://www.sandberg.world/warranty)

**5**

Years  
Warranty

### Survivor Radio All-in-1 5000

Capacity: 5000 mAh (18.5 Wh)

Solar Panel Voltage: 5V, 95 mA (0.48W max)

Hand crank power: 5V, 380 mA (1.9W max)

USB-A output: 5V/2A    USB-C input: 5V/1.5A

Radio AM: 520 - 1710KHz

Radio FM: 87.0 - 108.0 MHz

Product weight: 301g

Item no. 421-03

[www.sandberg.world](http://www.sandberg.world)

Sandberg A/S

Bregnerødvej 133D,  
3460 Birkerød, Denmark

Made in China



**NOTE:** For optimal battery performance, we recommend fully discharging and recharging the power bank at least once every three months.

